

CHAIN LINK FENCING FOR CARROLL COUNTY RECREATION DEPARTMENT

The Carroll County Board of Commissioners submits Addendum 1 to Solicitation No. 09-A017, **CHAIN LINK FENCING FOR CARROLL COUNTY RECREATION DEPARTMENT**. In an effort to clarify Specifications, Conditions and Terms the following changes or additions are made to the original Request for Proposal (RFP). Also, Section E has been deleted and Sections H and I are added.

I. GENERAL CHANGES AND ADDITIONS TO ORIGINAL SOLICITATION

1. The County will stake the lay-out and reference points for fence work. Also, all underground utility services will be located and marked by the County prior to the commencement of work.
2. All fabric will be installed on the field side of the fence.
3. All poles will be set in concrete.
4. Posts specifications-
 - Schedule 40 Pipe
 - 2" Minimum for posts 6' and under
 - 4" Minimum for backstop posts
 - 2 ½" Minimum for Terminal Posts
 - 3" Minimum for Gate Posts
5. Rail specifications-
 - Schedule 40 Pipe
 - Top Rail 1 5/8" Minimum
 - Bottom Rail 1 5/8" Minimum
6. Buried depth for posts-
 - 30' posts will be buried a minimum 5' with a minimum hole diameter 4 times pipe width.
 - 20' posts will be buried a minimum 4' with a minimum hole diameter 4 times pipe width.
 - 16' posts will be buried a minimum 4' with a minimum hole diameter 4 times pipe width.
 - 10' posts will be buried a minimum 3' with a minimum hole diameter 4 times pipe width.
 - 8' posts will be buried a minimum 3' with a minimum hole diameter 4 times pipe width.
 - 6' posts will be buried a minimum 3' with a minimum hole diameter 4 times pipe width.

7. All vehicle gates will be 12' opening unless otherwise specified.
8. All walk-through gates (pedestrian) will be 4' opening unless otherwise specified.
9. Use existing fence where applicable.
10. The netting shall be made from nylon.


II. CHANGES TO SPECIFIC FIELD PROJECTS

1. PART A (Irrigation Pond Gate) - New Part A: Install approximately two hundred (200) lineal feet of fencing to match existing material, running along shore line of Irrigation Pond to the existing Pump House. Fence posts anchored in concrete spaced no more than ten (10) feet apart, beginning at the existing terminal post and terminating at the Pump House (to the left of electrical panel). Install a twenty (20) feet vehicle gate, and approximately eight (8) feet of fencing, between Pump House and existing retaining wall (railroad ties). See attachment (1) for lay-out.
2. PART B (Soccer Concession Gate) – Fence will begin at corner post of the existing fence (corner of Irrigation Pond) and run two hundred and seventy (270) linear feet terminating at the existing retaining wall (railroad ties). Fence shall match existing fence. This stretch of fence will contain a twelve (12) foot vehicle gate. See attachment (1) for lay-out.
3. PART C (Soccer Field Repair) – Add the following clarification statement to the existing specification found in the original RFP: Match existing material.
4. PART D (Football Field Repair) – Add the following clarification statement to the existing specification found in the original RFP: Change gauge of fabric to nine (9) gauge. Fence will be relocated to run along existing sidewalk.
5. PART E (Retention Pond Repair) - Delete entire section.
6. PART F (200' Field) - Make changes in backstop and fencing (height and linear footage) to reflect measurements shown on attachment (2) of this addendum.
7. PART G (250' Field) – Make changes in changes in backstop and fencing (height and linear Footage) to reflect new measurements shown on attachment (3) of this addendum.
8. PART H (Track Fencing) - **NEW.** Add this project to RFP. Install approximately sixteen hundred (1600) feet of four (4) foot high fencing around track with a four (4) foot walk-through gate. This will include enough fencing to include the chute area. Fence will be nine gauge. See attachment (4) of this addendum for lay-out.
9. PART I (Outfield Netting) – **NEW.** Add this project to RFP. Install approximately five-hundred fifteen (515) feet of nylon netting around existing ball field. Currently the existing outfield fence is eight (8) feet high and needs an additional eight (8) feet of netting. Install sixteen (16) feet high, three (3) inch diameter poles, outside existing outfield fence. The netting will be hung from these poles. Spacing for these poles shall not exceed twenty (20) feet apart.

All other Specifications, Terms and Conditions, not affected by the above changes and additions, remain in effect.


Bidders shall indicate in their proposals they have received this addendum (Addendum 001, CHAIN LINK FENCE CARROLL COUNTY RECREATION DEPARTMENT (Solicitation 09-A017)). Proposals without this acknowledgement will be rejected.

R. Benedict
Purchasing Manager
(770) 830-5868
rbenedict@carrollcountyga.com

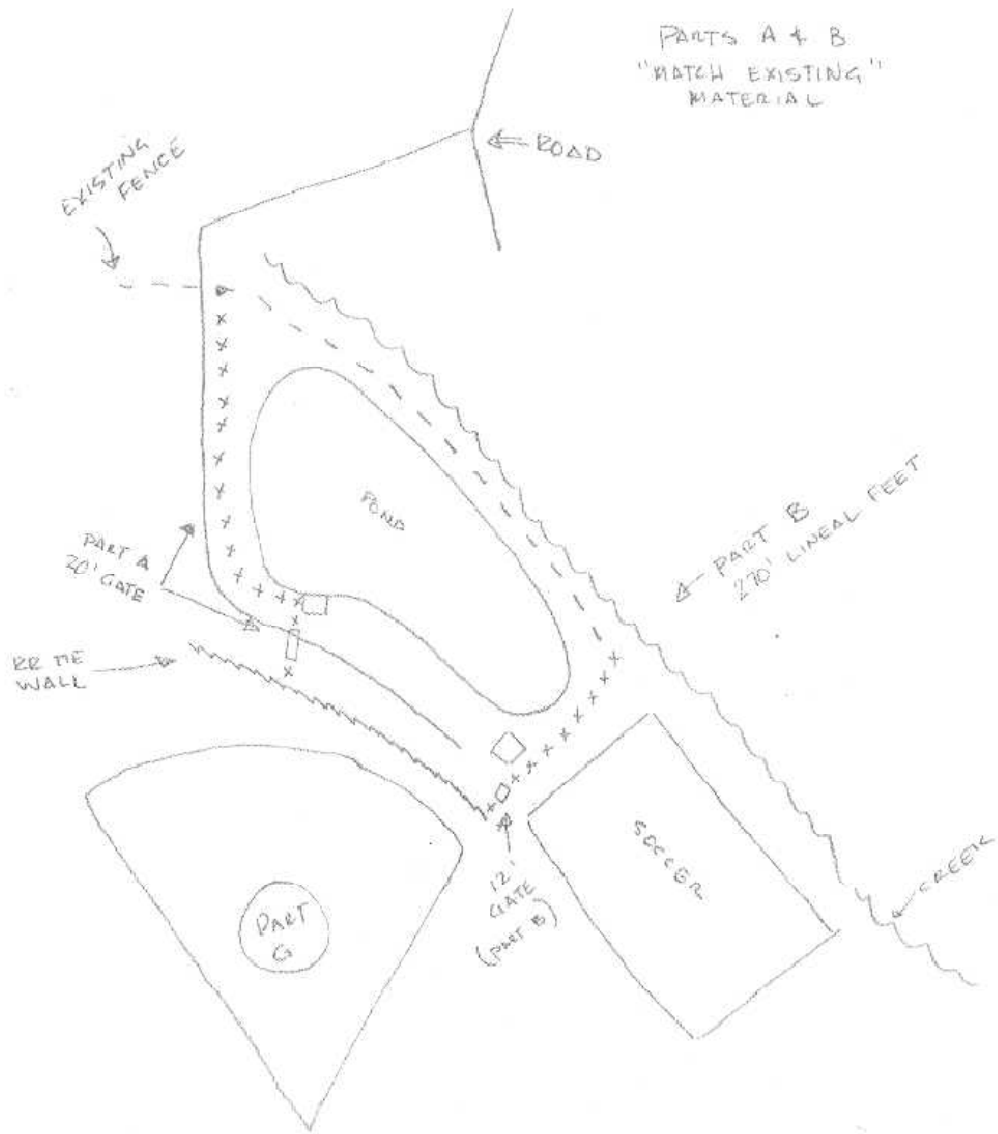


X = NEW FENCE

Attachment #1

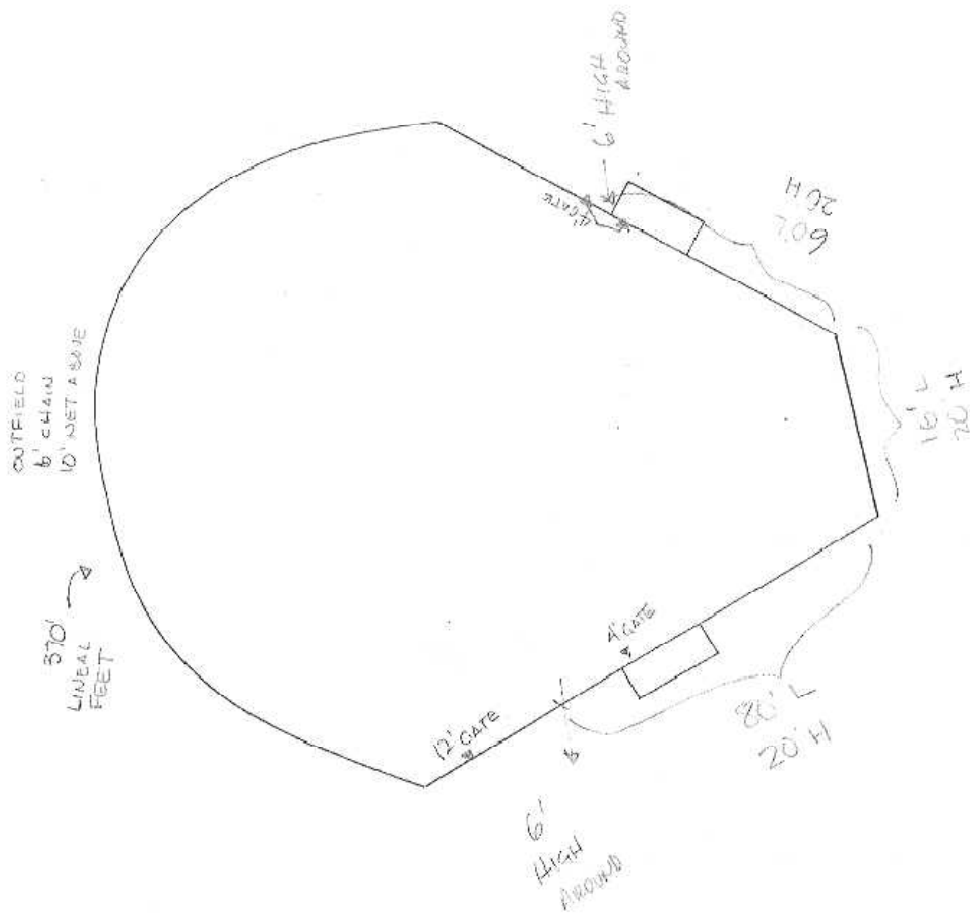

200' FIELD
 DIA. 2
 PART F

attachment #2

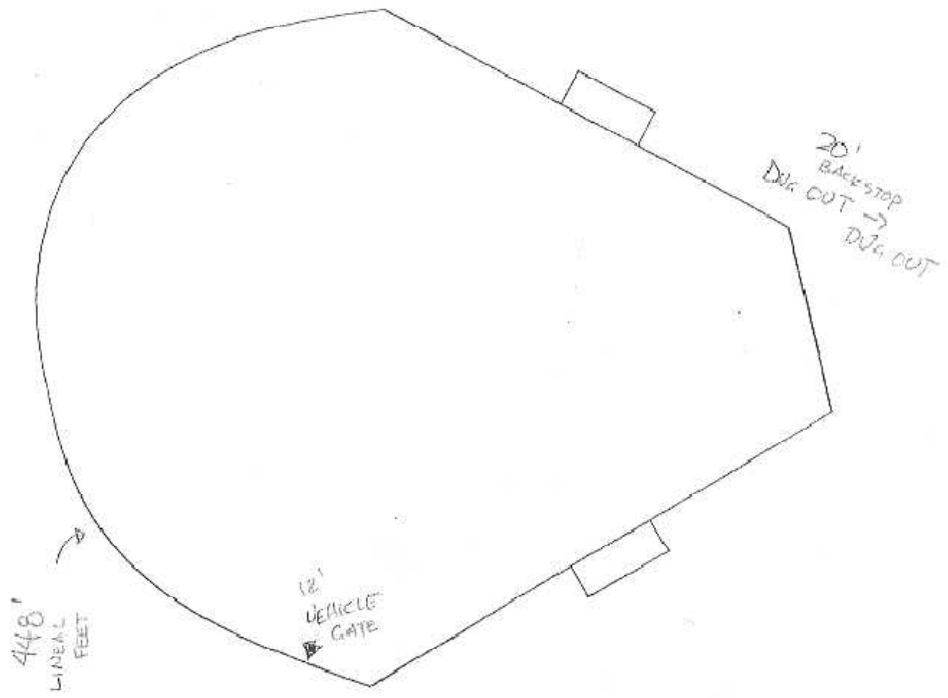


250' FIELD
DIAG. 2
PART G

attachment #3

CARROLL CO
REC TRACK
PROPOSED

2/9/09

8 LANE
400M
DUAL
42"
LANE

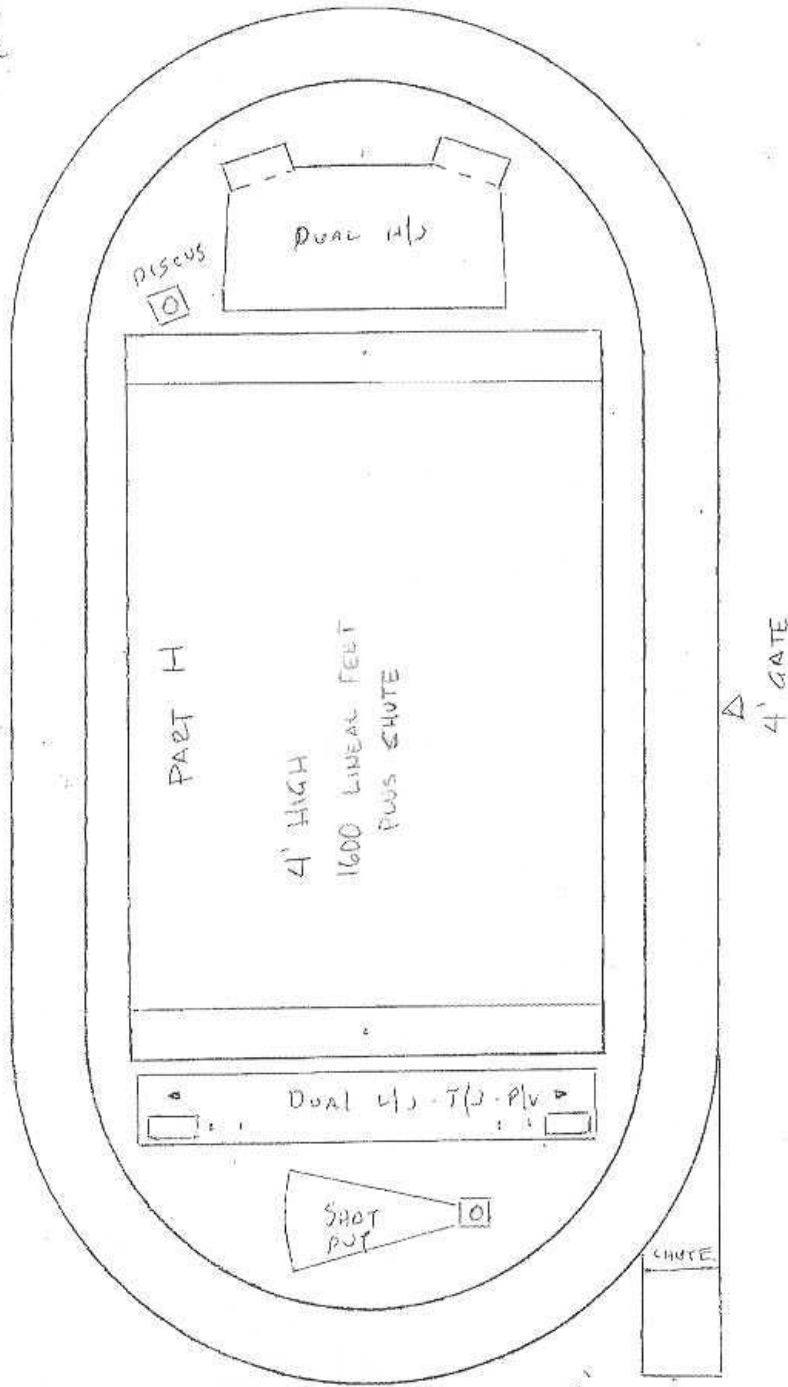

12'
DRIVE
GATE

REC
BLDG

Attachment # 4